

## BASIC

The BASIC version has been designed for those customers who look for professional lab equipment at a very competitive price. The cooled incubators (ST) and refrigerators in the BASIC version feature aluminum interior and powder-coated sheet housing (RAL 7035) with a graphite (RAL 7016) front panel. This combination of construction materials maintains the quality of the equipment and guarantees an attractive price.

model	Interior	housing
BASIC	aluminum	powder coated sheet



## COMFORT

The COMFORT version is ideal for those customers who appreciate high quality products, reasonably priced. The inner chamber is made of smooth stainless steel (to DIN 1.4016) being a great advantage. The external housing can either be constructed of a powder-coated sheet (RAL 7035) with a graphite front panel (RAL 7016) - COMF, or polished stainless steel - COMF/S.

model	interior	housing
COMF	stainless steel to DIN 1.4016	powder coated sheet
COMF/S	stainless steel to DIN 1.4016	polished stainless steel

## PREMIUM

The PREMIUM version equipment is produced of highest quality materials, mechanically and chemically resistant. It features an acid-proof stainless steel (to DIN 1.4301) interior. The external housing can either be constructed of a powder-coated sheet (RAL 7035) with a graphite front panel (RAL 7016) - PREM, or polished stainless steel - PREM/S. Additionally, the ST units are equipped with class 2.0 temperature protection system to DIN 12880 to protect the samples.

model	interior	housing
PREM	stainless steel to DIN 1.4301	powder coated sheet housing
PREM/S	stainless steel to DIN 1.4301	polished stainless steel



## PREMIUM TOP+

The PREMIUM TOP+ version is comprised of all the features of the PREMIUM version with advanced programming possibilities. Constructed of an acid-proof stainless steel (to DIN 1.4301) interior and a powder-coated sheet (RAL 7035) with a graphite front panel (RAL 7016) - PREM, or polished stainless steel - PREM/S housing, the equipment includes a large, full colour LCD touch screen, Windows CE system and remote control via Ethernet. The temperature values can be displayed on the screen in a tabular or graphic form. There are also adjustable ramps and hold at set point times, individually for each program segment. The TOP+ version can store up to 20 user programs, each of up to 100 temperature-time segments. The Admin function allows to manage Users and set up access policy. Additionally, for ST units in standard, maximum temperature is +70 °C. Moreover, the units in TOP+ version are equipped with temperature protection class 3.3 for ST and 3.2 for CHL to DIN 12880 (see page 67).

model	interior	housing
PREM TOP+	stainless steel to DIN 1.4301	powder coated sheet
PREM/S TOP+	stainless steel to DIN 1.4301	polished stainless steel

## Cooled incubators (ST)

### Application

- BOD determination
- microbiological research
- plant growing and microorganisms breeding at specified temperature
- storage of liquids and samples for physicochemical analysis

Cooled incubators (ST) can provide stable temperature conditions between +3...+70°C regardless of ambient conditions (equipped with both heating and cooling systems).

+3...+40/+70°C



### Calibration




All thermostatic equipment manufactured by POL-EKO-APARATURA can be provided with Calibration Certificate issued by accredited Measurement Laboratory. Detailed information on accreditation of POL-EKO Laboratorium Pomiarowe is available on website: [www.polekolab.pl](http://www.polekolab.pl).

Models BASIC, COMFORT, PREMIUM are equipped with a PID microprocessor controller with an LCD graphic display and illuminated touch buttons.


### Controller advantages

- six segment temperature-time profile
- 3 user programs memory
- loop function up to 99 times or endless
- adjustable start delay feature (from 1 min to 99:59 h)
- adjustable hold at set point time for temperature and lighting (for ST/FOT) from 1 min to 31 days / 1 min to 99:59 h or continuous operating
- overview of set and current parameters while operating
- recording of min, average and max temperature value for each segment
- audible and visual temperature alarm
- operating with temperature priority mode
- defrosting function
- temperature sensor fail alarm
- power failure control system (program continued after restoring power)
- digital timer
- real time clock
- auto-diagnostic function
- internal memory to store up to 2046 data records
- automatic fan shut-down after completing the program
- forced air convection with optional fan speed control 50-100%

Detailed description of parameters on page 56.

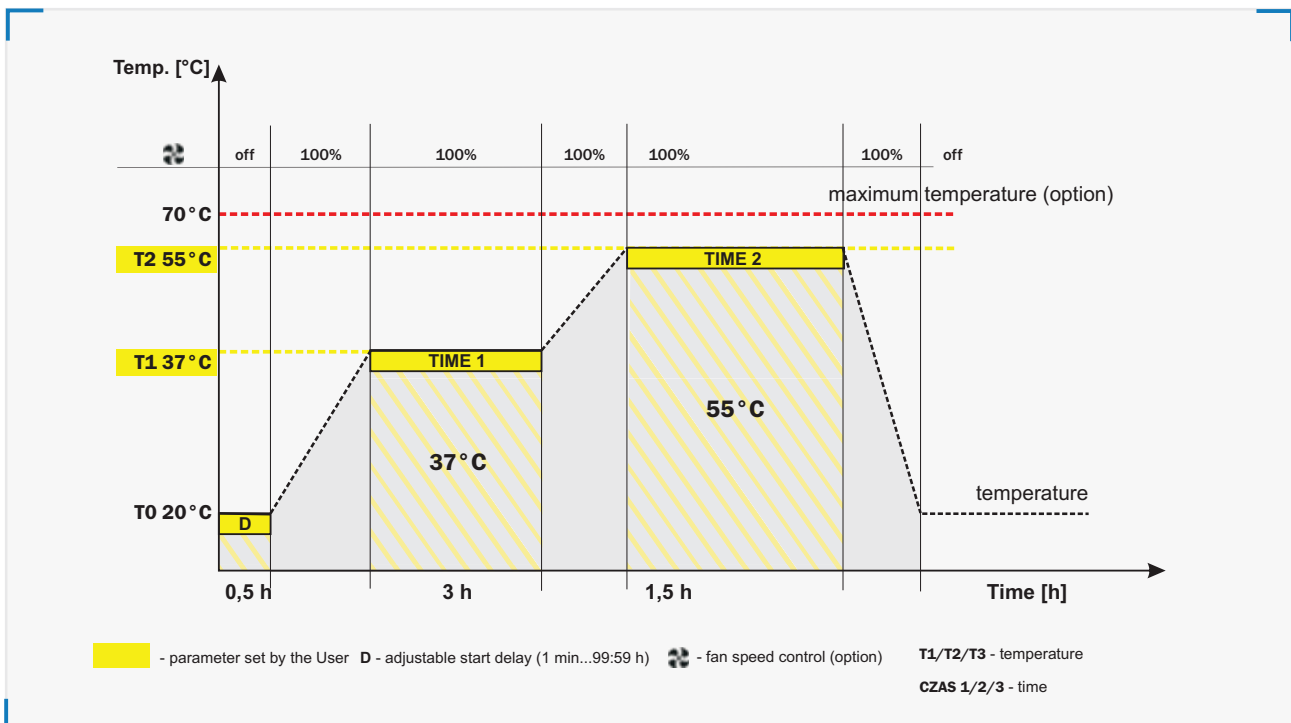

## Control panel

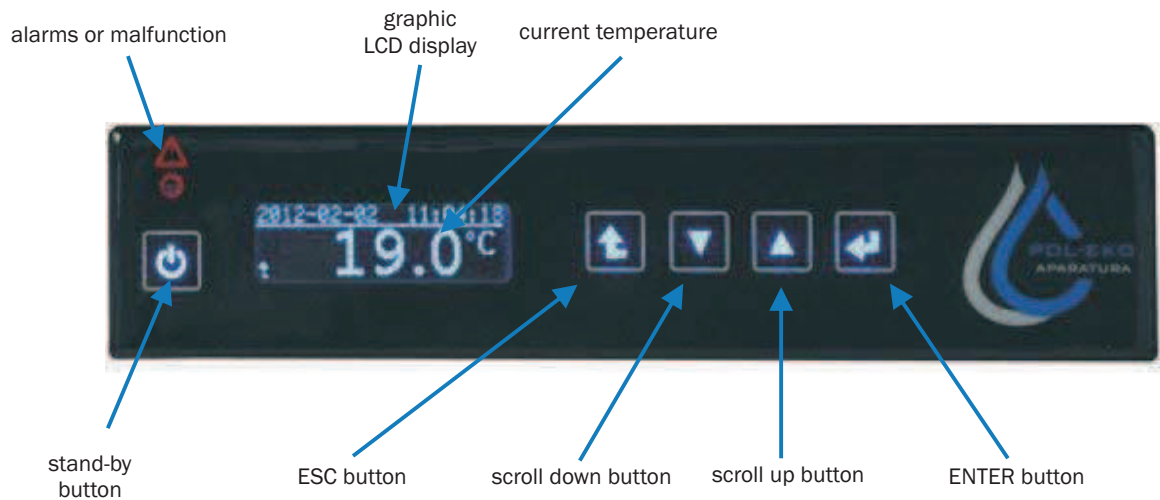

## Standard features

- solid door
- temperature range +3...+40°C
- RS 232 and USB interface allow to download relevant program data with the free EasyLab Basic software available on the website or with the EasyLab Professional software (see page 68); cables to be ordered separately (RSK or USBK option)
- wire shelves for BASIC and stainless steel wire shelves for COMFORT and PREMIUM models
- quality control protocol
- English instruction manual
- available menu languages: Czech, English, Estonian, French, German, Italian, Latvian, Polish, Portuguese, Russian, Spanish,
- temperature protection 1.0 class for BASIC and COMFORT units and 2.0 for PREMIUM units to DIN 12880
- door lock
- open door alarm
- access port: Ø30 mm
- internal LED light
- wheels in standard for models ST 1200 and 1450



All the units in TOP+ version are equipped with PID microprocessor controller with a large (5,7") full colour touch screen, intuitive menu and user friendly software. They can be connected to Ethernet network for remote control from any computer, being one of the greatest advantages.


### Controller advantages

- Administrator function to manage User accounts
- access control via login
- 7-days programming
- multi-segment temperature-time profile (up to 100)
- loop function up to 99 times or endless
- adjustable start delay feature (from 1 min to 99:59 h or date/time)
- adjustable hold at set point time for temperature and lighting (for ST/FIT) from 1 min to 999:59 h, or continuous operating
- adjustable ramps
- overview of set and current parameters while operating
- recording of min, average and max temperature value for each segment
- possibility of temperature calibration by the User
- audible and visual temperature alarm
- operating in temperature or time priority mode
- defrosting function
- temperature sensor fail alarm
- power failure control system (program continued after restoring power)
- digital timer
- real-time clock
- auto-diagnostic function
- forced air convection with fan speed control (50-100%)
- automatic fan shut-down after completing the program


Detailed description of parameters on page 56.

### GLP supporting functions

- password protected settings
- 20 user programs memory
- internal memory to store up to 4100 data records for each User, possibility to overview the values on the display or a PC computer in tabular or graphic form
- USB port to allow direct data recording or transfer into a flash drive
- events registry
- TOP+ control software (see page 69)

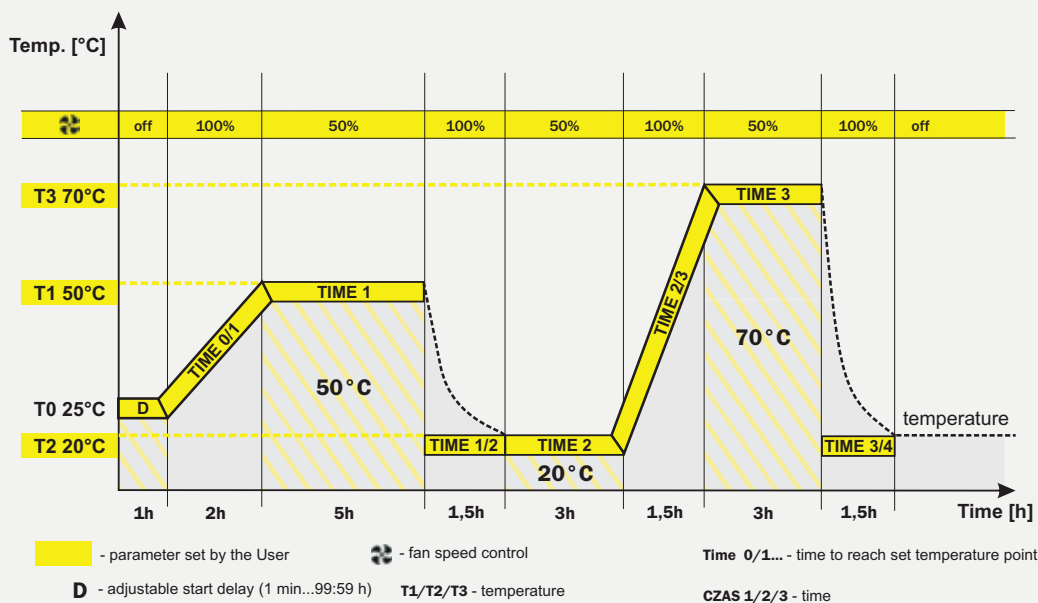


## Control panel

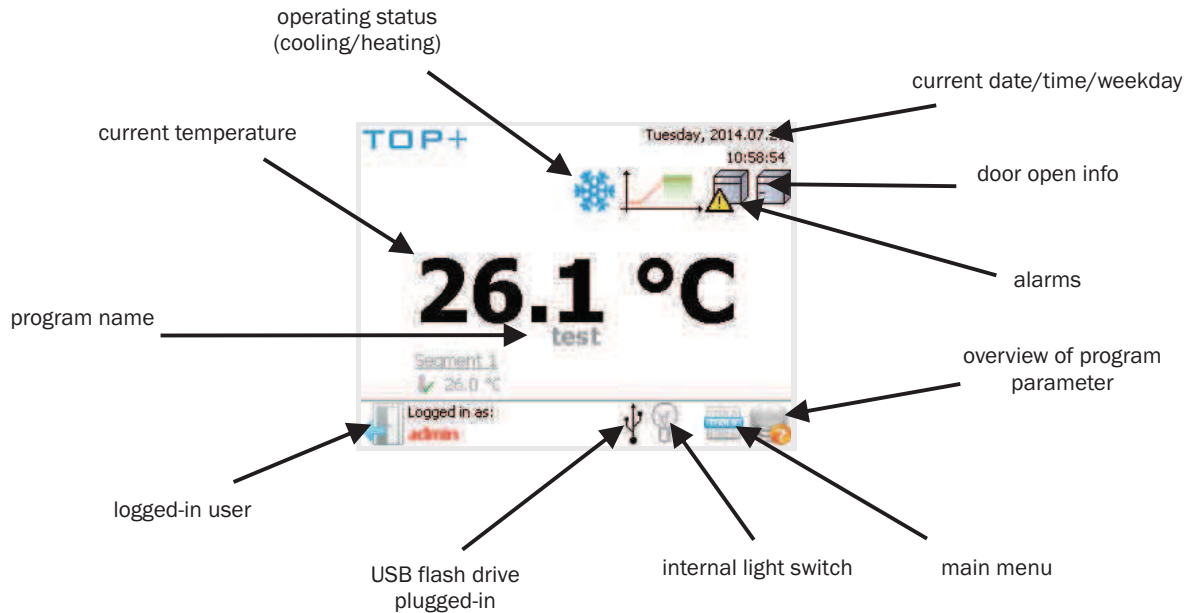

## Standard features

- solid door
- temperature range +3...+70 °C
- RS 232 interface and USB port to allow direct recording and data transfer onto a flash drive; data can also be downloaded with the free TOP+ Control software (see page 69) or the EasyLab Professional software (see page 68); cables to be ordered separately (RSK or USBK)
- Ethernet port for remote control; Ethernet cable
- TOP+ Control software
- wire stainless steel shelves
- quality control protocol
- English instruction manual
- available menu languages: English, Estonian, French, German, Hungarian, Italian, Latvian, Polish, Portuguese, Romanian, Russian, Spanish
- temperature protection 3.3 class to DIN 12880
- door lock
- open door alarm
- access port: Ø30 mm
- internal LED light
- wheels in standard for models ST 1200 and 1450

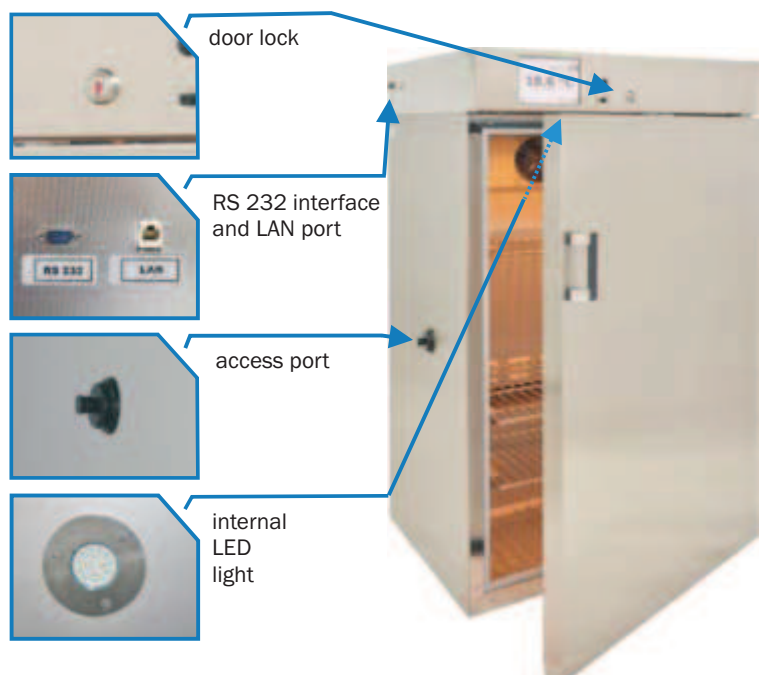

Model		ST 1	ST 2	ST 3	ST 4	ST 5	ST 500	ST 700	ST 1200	ST 1450
Parameter										
air convection		forced								
chamber capacity <sup>1</sup> [l]		68	150	200	250	300	493	625	1365	1460
door type		solid/glass or double <sup>2</sup> (option)								
temperature range [ °C]		+3...+40°C / up to +70°C (option) / +3...+70°C in PREM TOP+								
controller		microprocessor with external LCD graphic display								
interior	BASIC	aluminum								
	COMF	stainless steel to DIN 1.4016								
	COMF/S	stainless steel to DIN 1.4016								
	PREM (TOP+)	stainless steel to DIN 1.4301								
	PREM/S (TOP+)	stainless steel to DIN 1.4301								
housing	BASIC	powder coated sheet								
	COMF	powder coated sheet								
	COMF/S	stainless steel								
	PREM (TOP+)	powder coated sheet								
	PREM/S (TOP+)	stainless steel								
overall dims <sup>3</sup> [mm]	width	570	620	620	620	620	645	735	1440	1450
	height	600	860	1060	1260	1460	2025	2025	2045	1970
	depth	670	640	640	640	640	820	870	860	950
internal dims <sup>4</sup> [mm]	width	470	520	520	520	520	510	600	1310	1340
	height	430	660	860	1060	1260	1510	1510	1510	1460
	depth	300	420	420	420	420	640	690	690	750
max shelf workload <sup>5</sup> [kg]	-	10	10	10	10	10	20	30	30	30
	PW <sup>6</sup> version	on request					100	100	100	100
max unit workload [kg]	-	20	30	40	50	60	100	150	300	300
	W <sup>7</sup> version	on request								
nominal power [W]		160	170	170	330	330	400	400	550	550
weight <sup>8</sup> [kg]		32	54	59	69	75	105	115	185	200
temperature resolution [ °C]		every 0,1								
temperature fluctuation <sup>9</sup> at +37 °C [ °C]		±0,2	±0,2	±0,2	±0,2	±0,2	±0,2	±0,2	±0,2	±0,2
temperature variation <sup>10</sup> at +37 °C [ °C]		±0,4	±0,4	±0,4	±0,5	±0,6	±0,6	±0,6	±0,6	±0,6
over temperature protection		class 1.0 to DIN 12880 / class 3.3 (option) / class 2.0 in PREM / class 3.3 in PREM TOP+								
voltage*		230V 50Hz								
shelves fitted		2	3	3	4	4	3	3	2 x 3 <sup>11</sup>	2 x 3 <sup>11</sup>
warranty		24 months								
manufacturer		POLEKO-APARATURA								

\* 230V 60Hz, 115V 60Hz also available

1 - working capacity of chamber can be smaller

2 - additional internal glass door

3 - ST 1-5 in TOP+ version are 60 mm higher, depth doesn't include 50 mm of power cable

4 - dims of units with double door can be smaller

5 - on uniformly loaded surface

6 - reinforced shelf

7 - reinforced version


8 - for units in BASIC version with solid door

9 - fluctuation measured in centre of chamber

10 - in space

11 - two columns with 3 shelves each

### Options and accesories (icon description see page 55)

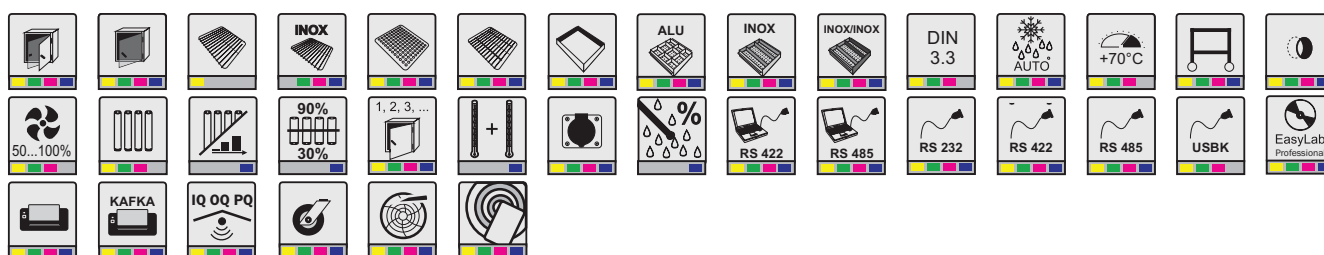

■ BASIC    ■ COMF    ■ PREM    ■ PREM TOP+




Parameter		Model	ST 1/1	ST 1/1/1	ST 2/2	ST 2/3	ST 2/4	ST 3/3	ST 350/350
air convection		forced							
chamber capacity <sup>1</sup> uper/lower [l]		68/68	68/68/68	150/150	150/200	150/250	200/200	294/294	
door type		solid / glass or double <sup>2</sup> (option)							
temperature range [°C]		+3...+40 / up to +70°C (option) / +3...+70°C in PREM TOP+							
controller		microprocessor with external LCD graphic display							
interior	BASIC	aluminum							
	COMF	stainless steel to DIN 1.4016							
	COMF/S	stainless steel to DIN 1.4016							
	PREM (TOP+)	stainless steel to DIN 1.4301							
	PREM/S (TOP+)	stainless steel to DIN 1.4301							
housing	BASIC	powered coated sheet							
	COMF	powered coated sheet							
	COMF/S	stainless steel							
	PREM (TOP+)	powered coated sheet							
	PREM/S (TOP+)	stainless steel							
overall dims <sup>3</sup> [mm]	width	570	570	620	620	620	620	720	
	height	1170	1740	1680	1875	2080	2080	2045	
	depth	670	670	640	640	640	640	860	
internal dims <sup>4</sup> [mm]	width	470	470	520	520	520	520	600	
	height	430	430	660	660/860	660/1060	860	700	
	depth	300	300	420	420	420	420	700	
max shelf workload <sup>5</sup> [kg]	-	10	10	10	10	10	10	30	
	PW <sup>6</sup> version	on request							
max unit workload [kg]	-	20	20	30	30/40	30/50	40	75	
	W <sup>7</sup> version	on request							
nominal power [W]		320	480	350	350	350	350	800	
weight <sup>8</sup> [kg]		65	98	109	114	124	119	175	
temperature resolution [°C]		every 0,1							
temperature fluctuation <sup>9</sup> at +37°C [°C]		see table of single chamber units							
temperature variation <sup>10</sup> at +37°C [°C]		see table of single chamber units							
over temperature protection		class 1.0 to DIN 12880 / class 3.3 (option) / class 2.0 in PREM / class 3.3 in PREM TOP+							
voltage*		230V 50Hz							
shelves fitted		see table of single chamber units							
warranty		24 months							
manufacturer		POL-EKO-APARATURA							

\* 230V 60Hz, 115V 60Hz also available

- 1 - working capacity of chamber can be smaller
- 2 - additional internal glass door
- 3 - depth doesn't include 50 mm of power cable
- 4 - dims of units with double door can be smaller
- 5 - on uniformly loaded surface

- 6 - reinforced shelf
- 7 - reinforced version
- 8 - for units in BASIC version with solid door
- 9 - fluctuation measured in centre of chamber
- 10 - in space

## Options and accesories (icon description see page 55)

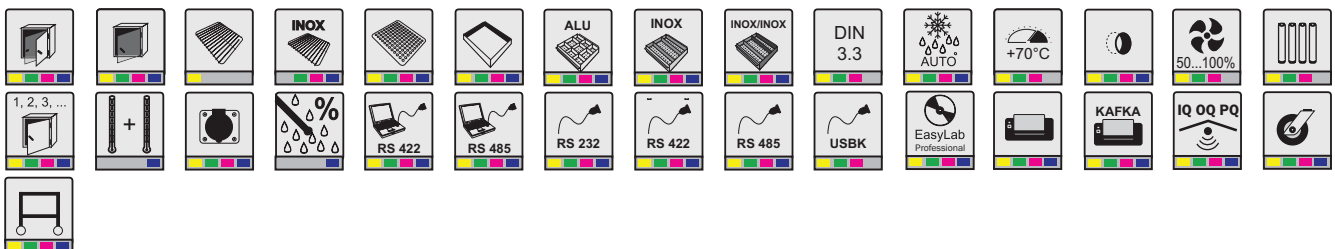

■ BASIC   
 ■ COMF   
 ■ PREM   
 ■ PREM TOP+