


Magnetic Levitated Turbomolecular Pumps

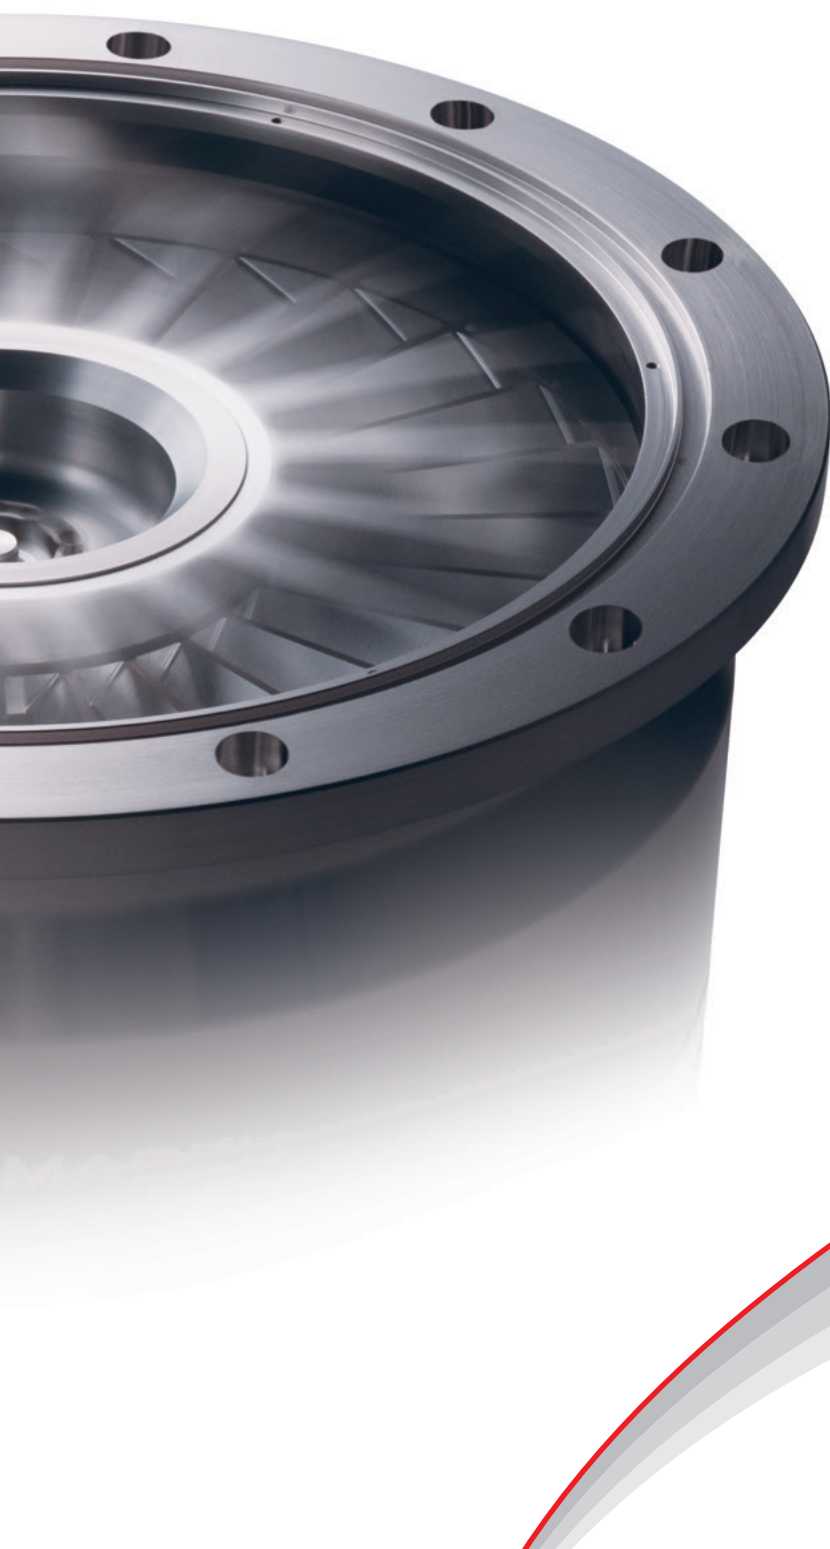

The Conditions Conducive to Quality


Made in Japan

Our integrated domestic production system, with its extremely high production efficiency, yields highly reliable products. It does this by providing in-house machining of components requiring a high degree of precision, one-by-one production that eliminates wastefulness from each process, and a production control system that responds in a timely manner to the needs of our customers. It also contributes to reductions in unnecessary power consumption at production sites, as well as reductions in CO₂ emissions. Shimadzu strives to be user-friendly and environmentally conscious on a daily basis by building on these sorts of straightforward measures.



Thoroughgoing Simulations to Heighten Quality

To ensure product quality, a number of simulations are done, such as for pumping performance analysis technology and rotor blade shape design, in pursuit of both performance and reliability. As a result of these measures, Shimadzu turbomolecular pumps are utilized world wide as highly reliable products with an extremely low failure rate.



To Ensure Safety


Highly safe product is put into practice by implementing a wide range of tests involving rotor breakdown, air inrush, high-speed touchdown, and power supply reliability. It goes without saying that this verification knowledge and expertise obtained through many years of experience, is applied uncompromisingly to our new turbomolecular pumps. At our manufacturing sites, quality control is scrupulously performed through the early detection of line defects based on statistical process control (SPC). In verifying reliability, there is no settling for "good enough."



Environmental Considerations in Product Development

The Shimadzu Group is committed to improving the environmental friendliness of products in an effort to also minimize our global environmental impact throughout the value chain. Product design and development personnel are improving the environmental friendliness of all products by applying Product Design Guideline requirements and satisfying new product review criteria for achieving lower environmental impact than previous models. In particular, products that achieve especially high environmental performance are offered to customers as certified Eco-Products Plus products.

Shimadzu will continue to make further contributions to the environment in the future as well, such as by supplying products that help achieve carbon neutrality, establish a recycling-oriented society, or improve working environments.

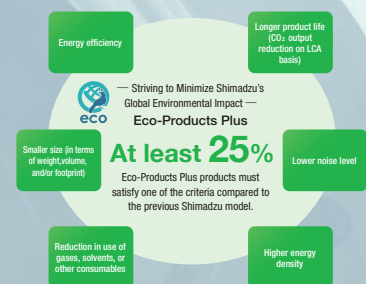


Features of Shimadzu Turbomolecular Pumps


Shimadzu provides pumps compatible with a variety of applications, from high vacuum processes to gas throughput processes. We contribute to improving the flexibility of equipment designs through pumps with integrated power supplies, as well as environmentally friendly energy-saving and compact designs.

Model with Separate Power Supply Unit


Power supply unit and control rack

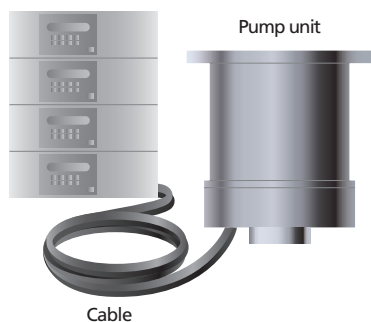

V Series with Integrated Power Supply Unit

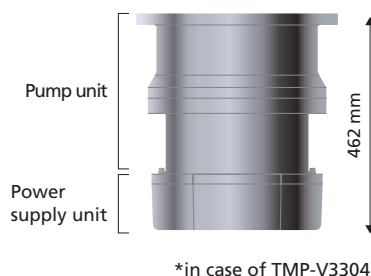

X Series with Integrated Power Supply Unit

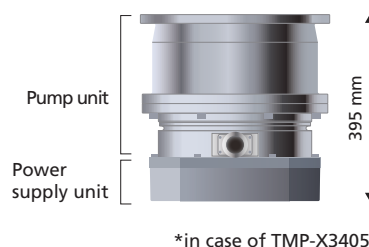

Network connection enabled

Various monitoring functions (power supply unit)

Coupling-free

A diverse lineup

Cable rack not required

Compact

Energy-saving

Even more compact

Temperature control function

IP54-compatible (power supply unit)

Energy-saving

Reactive Byproduct Resistant Wide-Range Turbomolecular Pumps

Shimadzu provides pumps with temperature control function. By keeping the pump temperature high, the deposition of leactive byproducts is prevented. As a result, the interval between pump overhauls is extended, contributing to long term stable operation.



Lineup

Flange Aperture (mm)		100	150 (160)	200	250	300 (320)	350	400
Application	Type							
CVD and etching	High-throughput chemical type				TMP-2404LMTB TMP-2804LMTF	TMP-3304LMTF TMP-3804LMTF	TMP-4304LMTF TMP-4805LMTF	TMP-5305LMTF
					TMP-2404LMTC TMP-2804LMTF TMP-X2905LMTF	TMP-3304LMTF TMP-3804LMTF TMP-X3405LMTF	TMP-4304LMTF TMP-4805LMTF	TMP-5305LMTF
Etching	Reactive byproduct resistant type		TMP-803LMTC	TMP-1003LMTC				
Ion implantation, CVD and etching	Wide-range, water-cooled chemical type	TMP-203LMC TMP-303LMC	TMP-403LMC TMP-803LMC	TMP-1003LMC	TMP-2404LMC TMP-2804LMC	TMP-3304LMC TMP-3804LMC TMP-X3405LMC	TMP-4304LMC	
PVD and inspection instruments	Air-cooled type	TMP-203M TMP-303M	TMP-403M TMP-803M	TMP-1003M				
	Wide-range, water-cooled type	TMP-203LM TMP-303LM	TMP-403LM TMP-803LM TMP-X1205LM	TMP-1003LM TMP-V1704LM TMP-X1605LM	TMP-2404LM TMP-V2304LM TMP-V2804LM	TMP-3304LM TMP-V3304LM		

Standard Specifications

TMP-03/04 Series

Turbomolecular pump model		TMP-203LM	TMP-303LM	TMP-403LM	TMP-803LM (0)	TMP-1003LM	TMP-1303LM (0)	TMP-1503LM	
Corresponding power supply unit		EI-S04M			EI-R04M				
Inlet flange		VG100 ICF152 ISO100B ISO100C	VG100 ICF152 ISO100B ISO100C	VG150 ICF203 ISO160B ISO160C	VG150 ICF203 ISO160B	VG200 ICF253 ISO200B	VG200 ICF253 ISO200B	VG250 ICF305 ISO250B	
Outlet flange		KF25			KF40				
Pumping Speed ^{*1)}	N ₂	190 L/s	320 L/s	420 L/s	800 L/s	1080 L/s	1300 L/s	1500 L/s	
	H ₂	120 L/s	320 L/s	340 L/s	700 L/s	790 L/s	750 L/s	800 L/s	
Rated speed		50000 rpm	45000 rpm	45000 rpm	35000 rpm	35000 rpm	30300 rpm	30300 rpm	
Weight		9 kg	14 kg	14 kg	33 kg	32 kg	39 kg	42 kg	

*1: Without a protective net. If a protective net is used, the pumping speed for N₂ gas will be as follows: TMP-203: 180 L/s; TMP-303: 300 L/s; TMP-403: 400 L/s; TMP-803 (0): 730 L/s; TMP-1003: 970 L/s; TMP-1303 (0): 1130 L/s; TMP-1503: 1380 L/s; TMP-2404: 2000 L/s; TMP-2804 (VG250): 2550 L/s; (ISO250B): 2300 L/s; TMP-3304 (0): 2900 L/s; TMP-3804 (VG300): 3450 L/s; (ISO320B): 3600 L/s; TMP-4304: 4000 L/s.

Power supply unit model		EI-S04M			EI-R04M				
Corresponding pump		TMP-203LM	TMP-303LM	TMP-403LM	TMP-803LM (0)	TMP-1003LM	TMP-1303LM (0)	TMP-1503LM	
Input power supply	Voltage	Single phase 100 to 120 V AC ±10 % (50/60 Hz ±2 Hz) Single phase 200 to 240 V AC ±10 % (50/60 Hz ±2 Hz)			Single phase 200 to 240 V AC ±10 % (50/60 Hz ±2 Hz)				
	Maximum power	450 VA	550 VA		1.0 kVA				
Weight		8 kg			8 kg				

TMP-V04 Series

Turbomolecular pump model		TMP-V1704LM	TMP-V2304LM	TMP-V2804LM	TMP-V3304LM (0)	TMP-V4404LMW
Inlet flange		VG200 ISO200B	VG250 ISO250B	VG250	VG300 VG350 ISO320B	VG350
Outlet flange		KF40				
Pumping Speed ^{*1)}	N ₂	1400 L/s	2100 L/s	2800 L/s	3200 L/s	4050 L/s
	Ar	1350 L/s	2000 L/s	2700 L/s	3100 L/s	1800 L/s
Rated speed		33700 rpm	33700 rpm	27600 rpm	27600 rpm	24000 rpm
Input power supply	Voltage	Single phase 200 to 240 V AC ±10 % (50/60 Hz ±2 Hz)				
	Maximum power	1.2 kVA				
Weight		60 kg	56 kg	94 kg	94 kg	98 kg

*1: Without a protective net. If the protective net is used, the pumping speed for N₂ gas will be as follows: TMP-V1704: 1300 L/s; TMP-V2304: 1950 L/s; TMP-V2804: 2550 L/s; TMP-V3304 (0): 2900 L/s.

TMP-X05 Series

Turbomolecular pump model		TMP-X1205LM	TMP-X1605LM	TMP-X2905LMC	TMP-X3405LMC
Inlet flange		VG150 ISO160B	VG200 VG250 ISO200B ISO250B	VG250 ISO250B	VG300 VG350 ISO320B
Outlet flange		KF40			
Pumping Speed ^{*1)}	N ₂	1080 L/s	1400 L/s	2500 L/s	3400 L/s
	H ₂	710 L/s	750 L/s	1900 L/s	2300 L/s
Rated speed		37200 rpm	37200 rpm	27600 rpm	27600 rpm
Input power supply	Voltage	Single phase 200 to 240 V AC ±10 % (50/60 Hz ±2 Hz)			
	Maximum power	0.75 kVA		1.7 kVA	
Weight		43 kg	41 kg	100 kg	89 kg

*1: Without a protective net. If a protective net is used, the pumping speed for N₂ gas will be as follows: TMP-X2905: 2300 L/s; TMP-X3405: 3000 L/s.

	TMP-2404LMC	TMP-2804LMC		TMP-3304LMC (0)	TMP-3804LMC		TMP-4304LMC
	EI-R04M						
	VG250 ISO250B	VG250 ISO250B		VG300 VG350 ISO320B	VG300 ISO320B		VG350
	KF40						
	2100 L/s	2800 L/s	2500 L/s	3200 L/s	3800 L/s	4000 L/s	4400 L/s
	1770 L/s	2100 L/s	2000 L/s	2200 L/s	2500 L/s	2500 L/s	2600 L/s
	27000 rpm	27600 rpm		27600 rpm	24000 rpm		24000 rpm
	70 kg	84 kg		84 kg	115 kg		105 kg

	EI-R04M				
	TMP-2404LMC	TMP-2804LMC	TMP-3304LMC (0)	TMP-3804LMC	TMP-4304LMC
	Single phase 200 to 240 V AC ±10 % (50/60 Hz ±2 Hz)				
	1.5 kVA				
	8 kg				

Turbomolecular Pump Model

TMP-


① ② ③ ④ ⑤ ⑥

Example

TMP-X 340 5 LM T C

	Symbol	Meaning
①	None	With separate EI-R04 power supply
	V	With integrated EI-V04 power supply
	X	With integrated EI-X05 power supply
②	(Numeral)	The pumping speed is approximately 10 times the value.
③	(Numeral)	Product series
④	M	Air-cooled magnetic levitation type
	LM	Water-cooled magnetic levitation type
⑤	None	No temperature control function
	T	With temperature control function
⑥	None	No coating
	C	With corrosion-proof coating
	F	With special coating

Pump Structure

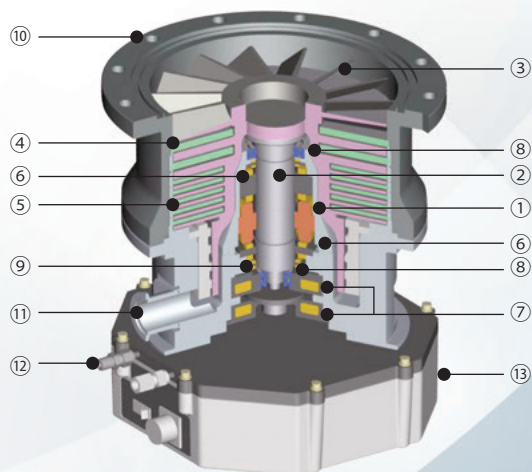


- ① High-frequency motor
- ② Shaft
- ③ Rotor blade
- ④ Stator blade
- ⑤ Spacer
- ⑥ Radial magnetic bearing
- ⑦ Axial magnetic bearing
- ⑧ Touchdown bearing
- ⑨ Gap sensor
- ⑩ Inlet
- ⑪ Outlet
- ⑫ Cooling water coupling
- ⑬ Power supply unit

Service and Maintenance

Turbo Molecular Pump Service Network


Our global network provides you safety, trust and satisfaction promptly.
In need of overhaul or repairment, please contact to our service bases.

If your area is not marked in the map below, Please contact to the closest base or our headquarters in Kyoto.
We kindly ask for your understanding that we are not able to provide our service in certain areas even marked in the map below.

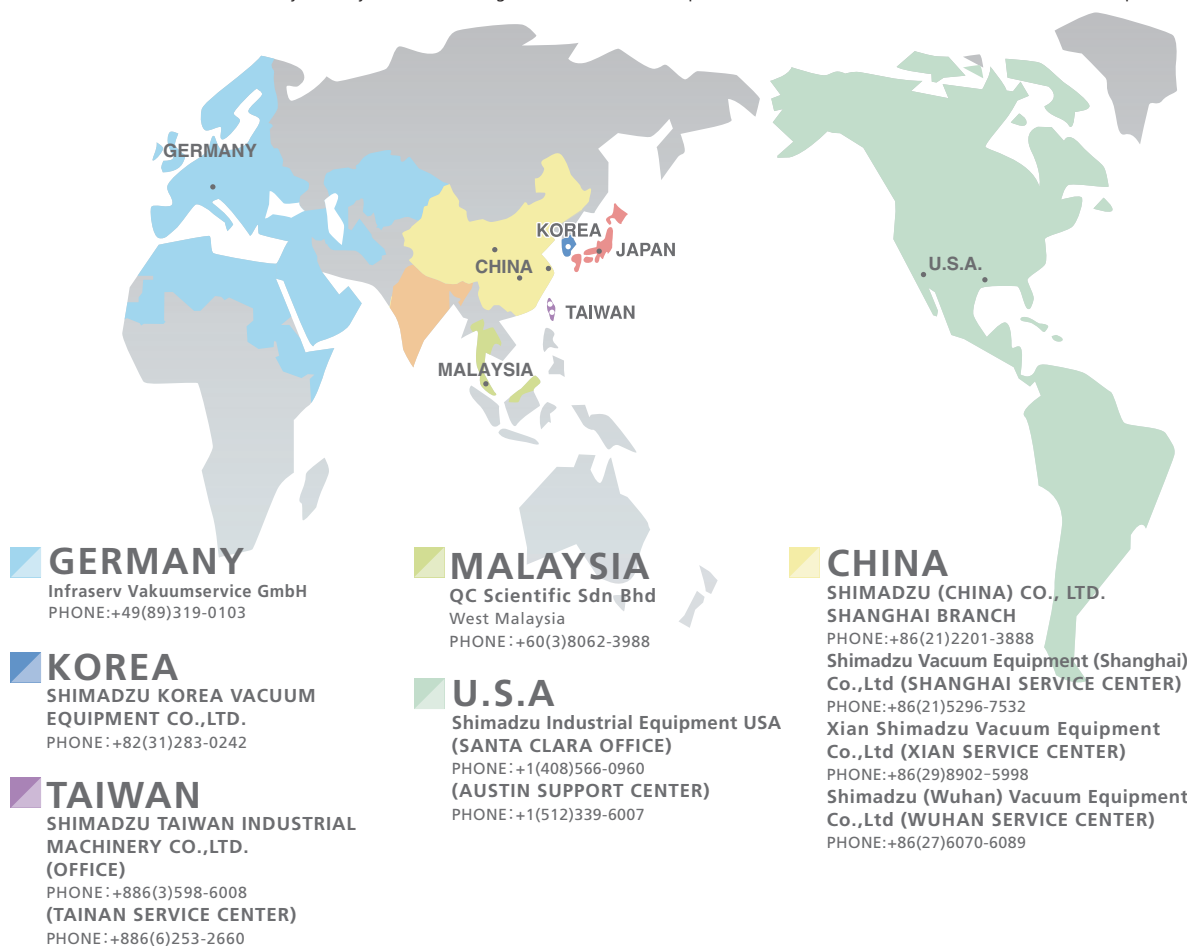

 **JAPAN**
Shimadzu Corporation
1 Nishinokyo Kuwabara-cho, Nakagyo-ku, Kyoto 604-8511

PHONE: +81(75)823-1693 FAX: +81(75)823-3684
E-mail: industry@group.shimadzu.co.jp
URL: <https://www.shimadzu.com/industry/index.html>

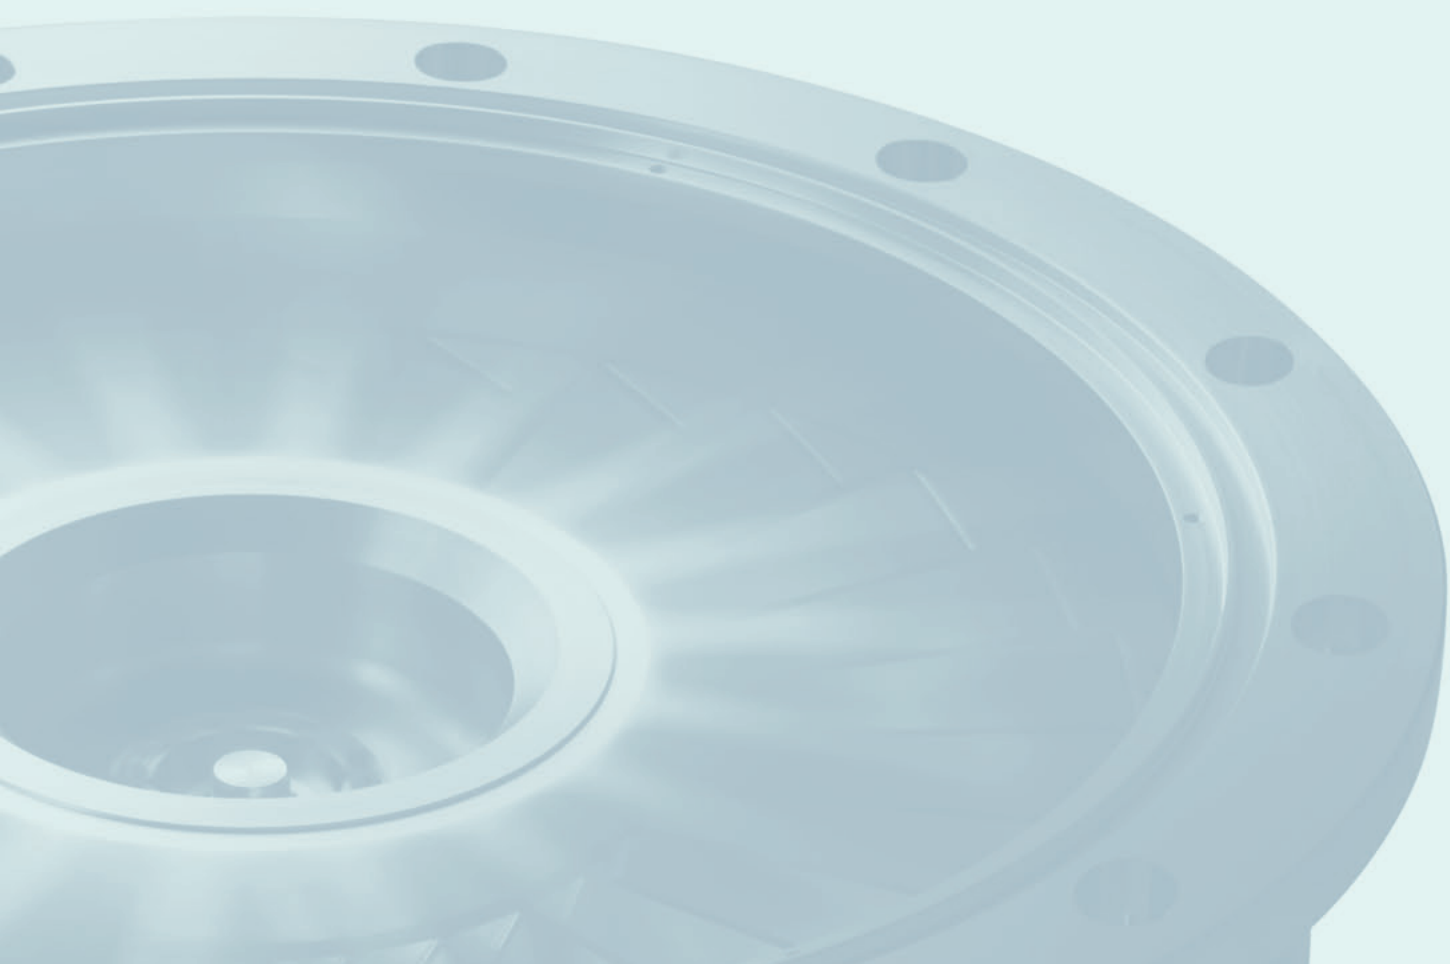



This product is certified as
Shimadzu's Eco-Products Plus.



Management
System
ISO 9001:2015
www.tuv.com
ID 0091004755



JQA-EM7749
SHIMADZU CORPORATION
Shimadzu Corporation Head Office,
Factories, and Related Offices



Shimadzu Corporation
www.shimadzu.com/industry/

Company names, product/service names and logos used in this publication are trademarks and trade names of Shimadzu Corporation or its affiliates, whether or not they are used with trademark symbol "TM" or "®". Third-party trademarks and trade names may be used in this publication to refer to either the entities or their products/services. Shimadzu disclaims any proprietary interest in trademarks and trade names other than its own.

For Research Use Only. Not for use in diagnostic procedures.
The contents of this publication are provided to you "as is" without warranty of any kind, and are subject to change without notice. Shimadzu does not assume any responsibility or liability for any damage, whether direct or indirect, relating to the use of this publication.

© Shimadzu Corporation, 2023

5001-09301-ODPIT